Janice Bowring

Twinprufe

FWH SYDNEY

CHILDREN'S DESIGNS

THREE—SIX YEARS

BOOK No. 194

1/6

F. W. HUGHES PTY. LTD., 30 GROSVENOR ST., SYDNEY, N.S.W.

-DESIGN No. 468-

BOY'S "KWICKNIT" PULLOVER
With Alternative Necklines

Illustrated at Left

MATERIALS REQUIRED: 1st size (crewe neck) 11, (polo neck) 12; 2nd size (crewe neck) 12, (polo neck) 13 balls F. W. Hughes' "Kooba" Kwicknit Fingering Wool shade No. 2405 (Cream Magnolia), 1 pr. No. 9 needles, 1 set of 4 No. 11 needles, 1 crochet hook, press studs.

MEASUREMENT: Length from top of shoulder 12″ (15″). Chest 24″ (26″). Length of sleeve seam 9½″ (14″).

TENSION: 5½ sts. 1″. 7½ rows 1″.

BACK: Using No. 11 needles cast on 68 (74) sts. Work in rib of K1, P1, for 1½″ (2″). Change to No. 9 needles and work as follows:

1st Row: * Wl.fwd., sl. 1 purlwise, K1, repeat from * to end.

2nd Row: * Wl.fwd., sl. 1 purlwise, K2 tog., repeat from * to end.

Repeat the 2nd row to form the pattern.

When work measures 7″ (9½″), shape armholes by casting off 3 (4) sts. at the beginning of the next 2 rows, allowing for increased sts. K2 tog. each end of the next 3 (3) rows. When armholes measure 4½″ (5″), shape shoulders by casting off 6 (5) sts. at the beginning of the next 6 (8) rows. Leave remaining sts. on a spare needle.

FRONT: (Crewe neck). Work the same as for back until armhole measures 3″ (3½″).

Next Row: Work 24 (26) sts., (leave on a spare needle), cast off 8 (8) sts., work 24 (26) sts.

Continued Overleaf

ABBREVIATIONS

K — Knit	**Dc.** — Double Crochet
P — Purl	**Ch.** — Chain
St. — Stitch	**W.** — White
Tog. — Together	**B.** — Black
Sl. — Slip	**R.** — Red
Wl.fwd. — Wool forward	**BL.** — Blue

ST.ST. (Stocking stitch): K 1 row, P 1 row, alternately.

GARTER ST.: K every row.

MOSS ST.: With an even number of stitches work as follows:—

1st Row: * K1, P1, repeat from * to end.

2nd Row: * P1, K1, repeat from * to end.

Repeat these 2 rows.

With an uneven number of stitches work as follows:—

K1, * P1, K1, repeat from * to end. Repeat this row throughout.

INSTRUCTIONS

WARNING: The knitting instructions in this book have been worked out by experts using F. W. Hughes' Knitting wool. Do not accept substitution. Only by using the wool specified and following the instructions and tension given can you assure success of your garment.

CAUTION: If it is contemplated having machine knitted ribbings extra wool will be required. Please be sure to buy this at the same time as your original purchase as no guarantee is made for each successive dye lot matching exactly.

When working Fair Isle or a pattern divisible by a large amount of sts., some sizes will necessitate commencing in the centre of a pattern. The sts. within the brackets are for 2nd and 3rd size. Where instructions read K0 (1-0) underline the size required and ignore all brackets until required size begins. This could read:

Knit 0 (1st size)
Knit 1 (2nd size)
Knit 0 (3rd size)

DESIGN No. 468

Continued from Page 1

Continue on last 24 (26) sts. and K2 tog. at neck edge of the next 3 (3) rows, then every 2nd row until decreased to 18 (20) sts. When armhole measures 4½″ (5″), shape shoulder by casting off 6 (5) sts. at armhole edge every 2nd row 3 (4) times. Join wool at neck edge and work other side to correspond.

FRONT: (Polo neck). Work the same as for back until armholes measure 2½″ (3″), then continue the same as for crewe neck.

SLEEVES: Using No. 11 needles cast on 36 (38) sts. Work in rib of K1, P1, for 2″ (2″). Change to No. 9 needles and work in pattern, increasing 1 st. each end of every 8th row until increased to 48 (50) sts. When sleeve seam measures 9½″ (14″) or required length, K2 tog. each end of every 2nd row until decreased to 46 sts., then every row until decreased to 16 sts. Cast off.

CREWE NECK: Join right shoulder seam. With right side of work towards you, using No. 11 needles, pick up and K about 52 (54) sts. around front edge of neck, then K the 20 sts. on spare needle. Work in rib of K1, P1, for ¾″ (1″). Cast off in ribbing.

POLO NECK: Join shoulder seams. With right side of work towards you, using 4 No. 11 needles, pick up and K about 56 (60) sts. around front of neck then K the 20 sts from spare needle. Work in rounds in rib of K1, P1, for 3½″ (4″). Cast off loosely in ribbing.

TO MAKE UP: Press all parts except basque cuff and neckbands. Stitch sleeves around armholes. Sew up side and sleeve seams. For crewe neck work 2 rows of DC. along back of shoulder opening and 1 row along front. Sew on press studs.

-DESIGN No. 462-

GIRL'S "KOOBA" CABLE ST. JUMPER

Illustrated at Right

MATERIALS REQUIRED: 7 (8-9) balls F. W. Hughes' "Kooba" Fingering Wool shade No. 2405 (Cream Magnolia), 2 prs. needles Nos. 9 and 11, 6 small buttons, 1 crochet hook.

MEASUREMENTS: Length from top of shoulder 11″ (12″-15″). Chest 22″ (24″-26″). Length of sleeve seam 9½″ (10½″-14″).

TENSION: 6 sts. 1″. 8 rows 1″.

BACK: Using No. 11 needles cast on 68 (74-80) sts. Work in rib of K1, P1, for 1½″ (2″-2¼″). Change to No. 9 needles and work as follows:—

1st Row: K12 (15-18), P2, K4, P2, K28, P2, K4, P2, K12 (15-18).

2nd Row: P12 (15-18), K2, P4, K2, P28, K2, P4, K2, P12 (15-18).

3rd Row: K12 (15-18), P2, sl. next 2 sts. on to a spare needle and leave in front, K2, K the 2 sts. from spare needle, P2, K28, P2, sl. next 2 sts. on to a spare needle and leave in front, K2, K the 2 sts. from spare needle, P2, K12 (15-18).

4th Row: Repeat 2nd row.

Repeat these 4 rows and when work measures 6½″ (7″-9½″), work as follows:—

Next Row: K12 (15-18), P2, K4, P2, K10, P2, K4, P2, K10, P2, K4, P2, K12 (15-18).

Next Row: P12 (15-18), K2, P4, K2, P10, K2, P4, K2, P10, K2, P4, K2, P12 (15-18).

Continue in this way working another cable pattern in the centre and shape armholes by casting off 3 (4-5) sts. at the beginning of the

Keep the new look in woollies with Lux

next 2 rows. K2 tog. each end of the next 4 (4-4) rows. When armholes measure 4″ (4½″-5″), shape shoulders by casting off 6 (6-7) sts. at the beginning of the next 6 rows. Leave remaining sts. on a spare needle.

FRONT: Work the same as for back until armholes measure 2″ (2¼″-2¾″).
Next Row: Work 23 (24-26) sts., leave on a spare needle, cast off 8 (10-10) sts., work 23 (24-26) sts.
Continue on last 23 (24-26) sts. and K2 tog. at neck edge of the next 3 rows, then every 2nd row until decreased to 18 (18-21) sts. When armhole measures 4″ (4½″-5″), shape shoulder by casting off 6 (6-7) sts. at armhole edge every 2nd row 3 times. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 11 needles cast on 38 (42-46) sts. Work in rib of K1, P1, for 1¾″ (2″-2″). Change to No. 9 needles and work as follows:—
1st Row: K15 (17-19), P2, K4, P2, K15 (17-19).
2nd Row: P15 (17-19), K2, P4, K2, P15 (17-19).
Continue in pattern and increase 1 st. each end of every 6th row until increased to 60 (62-64) sts. When sleeve seam measures 9½″ (10½″-14″) or required length, K2 tog. each end of every 2nd row until decreased to 50 sts. then every row until decreased to 16 sts. Cast off.

NECKBAND: Using No. 11 needles, with right side of work towards you, pick up and K about 50 (52-54) sts. around front of neck. Work in rib of K1, P1, for ¾″ (1″-1″). Cast off in ribbing. With right side of work towards you, work the sts. from spare needle around back of neck in rib for ¾″ (1″-1″). Cast off in ribbing.

TO MAKE UP: Press all parts except ribbing with a warm iron and damp cloth. Sew up 1″ of each shoulder seam. Stitch sleeves around armholes. Sew up side and sleeve seams. Work 2 rows of DC. along back of each shoulder opening and 1 row along front, making 3 loops of ch. on each shoulder to form buttonholes. Sew on buttons.

-DESIGN No. 469-

SNOW SUIT
in "Twinprufe" Crochet and Double Crepe Wool

Illustrated on Front Cover

MATERIALS REQUIRED. Jumper, Cap & Gloves: 7(8) balls F. W. Hughes' "Twinprufe" Crochet wool, shade No. 2434 (Red). 1 ball shade No. 1075 (White). **Trousers:** 7(9) balls F. W. Hughes' "Twinprufe" Double Crepe wool, shade No. 2434 (Red). 3 prs. needles Nos. 9, 10 and 12. 1 set of 4 No. 12 needles. Length of elastic.

MEASUREMENTS. Jumper: Length from top of shoulder 12″(15″). Chest 24″(26″). Length of sleeve seam 10″(14″). **Trousers:** Length of side fold 22½″(24″). Width round widest part 36″(39″). **Cap:** Width round face(17″).

TENSION: On 10 needles, 7 sts. 1″, 9 rows 1″. On No. 9 needles, 6 sts. 1″, 8 rows 1″.

JUMPER

BACK: Using No. 12 needles and R. wool, cast on 88 (96) sts. Work in rib of K1, P1 for 1½″ (2″). Change to No. 10 needles and work in st.st. When work measures 7½″ (10″), shape armholes by casting off 4 (5) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 4 (4) rows.

K 1 row. Using W. wool, P 1 row.

Work as follows:—

1st Row: K2W. * 3R., 3W., repeat from * to last 4 sts. K3R., 1W.

2nd Row: * P2R., 1W., repeat from * to end.

3rd Row: K2R., * 3W., 3R., repeat from * to last 4 sts. K3W., 1R.

4th Row: * P5W., 1R., repeat from * to end.

Repeat 3rd and 2nd rows.

7th Row: Using W. wool K.

Repeat from 6th to 1st rows inclusive.

14th Row: Using W. wool, P.

Continue with R. wool and when armhole measures 4½″ (5″), shape shoulders by casting off 7 (8) sts. at the beginning of the next 6 rows. Leave remaining sts. on a spare needle.

FRONT: Work the same as for back until armholes measure 2½″ (3″).

Next Row: K31 (34), leave on a spare needle, cast off loosely 10 (10) sts., K31 (34).

Continue in last 31 (34) sts. and K2 tog. at neck edge of the next 5 (5) rows, then every 2nd row until decreased to 21 (24) sts.

When armholes measure 4½″ (5″), shape shoulder by casting off 7 (8) sts. at armholes edge every 2nd row 3 times. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 12 needles and R. wool, cast on 44 (48) sts. Work in rib of K1, P1 for 2″ (2″). Change to No. 10 needles and work in st.st., increasing 1 st. each end of every 6th row until increased to 66 (72) sts. When sleeve seam measures 10″ (14″) or required length, K2 tog. each end of every row until decreased to 54 (60) sts. Using W. wool, P 1 row. Work the 14 rows of pattern.

Continue with R. wool and K2 tog. each end of every row until decreased to 14 sts. Cast off.

POLO NECK: Join shoulder seams. With right side of work towards you using 4 No. 12 needles and R. wool, K the 30 sts. from spare needle across back of neck, then pick up and K about 40 (44) sts. around front of neck. Work in rounds in rib of K1, P1 for 3½″ (4″). Cast off loosely in ribbing.

TO MAKE UP: Press all parts except ribbing with a warm iron and damp cloth. Stitch sleeves around armholes. Sew up side and sleeve seams.

TROUSERS

LEFT LEG: Using No. 9 needles cast on 80 (90) sts. Work in st.st. for 2″ then make a hem as follows:— Using a spare needle, pick up the cast on sts., then holding both needles tog., K tog. 1st from each needle to end of row. Shape the back as follows:—

1st Row: P70 (80), turn.
2nd and Alternate Rows: K.
3rd Row: P60 (70), turn.
5th Row: P50 (60), turn.
7th Row: P40 (50), turn.
9th Row: P30 (40), turn.
11th Row: P20 (30), turn.
13th Row: P10 (20), turn.
15th Row: 2nd size only, P10, turn.
16th Row: K.
18th Row: P.

Continue in st.st. increasing 1 st. each end of every 8th row until increased to 96 (106) sts. Continue in st.st. until work measures 20″ (21½″) measured down centre of work or required length.

Next Row: K8 (7) * K2 tog., repeat from * to last 8 (7) sts., K8 (7). 56 (60) sts.

Change to No. 12 needles and work in rib of K1, P1 for 2″ (2½″). Cast off loosely in ribbing.

RIGHT LEG: Work to correspond with left leg working shapings at top on K instead of P rows.

TO MAKE UP: Press with a warm iron and damp cloth. Sew up seams. Thread elastic through waist.

CAP

Using No. 10 needles and R. wool, cast on 50 sts.

1st Row: K44 (P1, K1) 3 times.
2nd Row: (P1, K1) 3 times, P44.

Repeat these 2 rows 11 times and on the next (3rd) and alternate rows K2 tog. at beginning and K twice into 7th st. from end. Work 2 rows without shaping. Work 24 rows, increasing 1 st. at the beginning and decreasing 1 st. at the end of every 2nd row (always shape on right side of work and inside ribbed border). Work 2 rows, then work 18 rows, knitting 2 tog. at the beginning of every 2nd row. Work 2 rows. Work 18 rows, increasing 1 st. at the begining of every 2nd row. Work 2 rows, then work 24 rows, knitting 2 tog. at the beginning and increasing 1 st. at the end of every 2nd row. Work 2 rows. Work 24 rows, increasing 1 st. at the beginning and knitting 2 tog. at the end of every 2nd row. Cast off.

TO MAKE UP: Press with a warm iron and damp cloth. Sew cast-on and cast-off edges together and make three small seams of the shaped sections at the back, thus having the ribbed border around the face and ears.

GLOVES

LEFT GLOVE: Using 4 No. 12 needles and R. wool, cast on 42 sts. (14 on each of three needles). Work in rib of K1, P1 for 2″. K 4 rounds.

5th Round: K to last 4 sts. in round, (K twice into next st., K1) twice.
K 3 rounds.
9th Round: K to last 6 sts. K twice into next st., K3, K twice into next st., K1.
10th Round: K to end of round.
K 2 rounds.
13th Round: K to last 8 sts., K twice into next st., K5, K twice into next st., K1.

Continue in this way increasing 2 sts. in every 4th round at end of round until increased to 52 sts. K 1 round. Then sl. all sts. on to a spare needle up to last 13 sts. in round, cast on 2 sts., P11, sl. last 2 sts. also on to a spare needle, turn, cast on 3 sts.

THUMB: Work with two needles on these 16 sts. in st.st. for 1½″.

Next Row: * K2 tog., K2, repeat from * to end.
Next Row: * P1, P2 tog., repeat from * to end.
Next Row: (K2 tog.) 4 times.

Break off wool, thread through darning needle, draw through sts., and fasten off. Then take the 41 sts. from spare needle, K them back on to three needles, picking up 5 sts. where cast on at base of thumb. Work on these 46 sts. in round for ¾″. Then arrange 23 sts. on each of two needles.

1st Finger: Take 6 sts. from each needle, cast on 2 sts. at the beginning of first 2 rows (16 sts.) and work in st.st. for 1¾″. Shape the top of finger the same as for thumb.

Continued on Page 11

BUY Beauclaire Buttons for perfect colour match

-DESIGN No. 463-

GIRL'S "KOOBA" CARDIGAN

MATERIALS REQUIRED: 7 (8) balls F. W. Hughes' "Kooba" Fingering Wool shade No. 2400 (Pink Tulip), 2 pairs needles Nos. 12 and 9, 5 (6) buttons, press stud.

MEASUREMENTS: Length from top of shoulder 12″ (15″). Chest 24″ (26″). Length of sleeve seam 10½″ (14″).

TENSION: 6 sts. 1″. 8 rows 1″.

BACK: Using No. 12 needles cast on 74 (80) sts. Work in rib of K1, P1 for 2″ (2½″). Change to No. 9 needles and work as follows:—

1st Row: K3 * sl. 1, K2, repeat from * to last 2 sts., sl. 1, K1.

2nd Row: P1 * sl. 1, P2, repeat from * to last st., P1.

3rd Row: K1 * K into front of 3rd st. and leave on needle, K2, sl. loop of 3rd st. off, repeat from * to last st., K1.

4th Row: P.

5th Row: K.

6th Row: P.

These 6 rows complete the pattern.

Continue in pattern and when work measures 7″ (9½″), shape armholes by casting off 4 (4) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 2 rows, then every 2nd row twice. When armhole measures 4½″ (5″), shape shoulders by casting off 6 (7) sts. at the beginning of the next 6 rows. Cast off.

LEFT FRONT: Using No. 12 needles cast on

43 (46) sts. Work in rib of K1, P1, for 2″ (2½″).

1st Row: K3 * sl. 1, K2, repeat from * to last 7 sts., sl. 1, K6.

Continue in pattern keeping the 5 border sts. in garter st. When work measures 7″ (9½″), shape armhole by casting off 4 (4) sts. at armhole edge of the next row. K2 tog. at armhole edge of the next 2 rows, then every 2nd row twice. When armhole measures 2½″ (3″), cast off 11 sts. at neck edge of the next row. K2 tog. at neck edge of the next 3 rows, then every 2nd row until decreased to 18 (21) sts. When armhole measures 4½″ (5″), shape shoulder by casting off 6 (7) sts. at armhole edge every 2nd row 3 times.

RIGHT FRONT: Work the same as for left front working shapings and border at opposite ends and making buttonholes as follows:— 1st one being ½″ from lower edge and 4 (5) more evenly spaced about 2″ (2¼″) apart.

BUTTONHOLES: K3, wl.fwd., K2 tog., work to end of row.

SLEEVES: Using No. 12 needles cast on 38 (40) sts. Work in rib of K1, P1, for 2″ (2½″). Change to No. 9 needles, increase 1 st. for 2nd size only. Work in pattern as for back, increasing 1 st. each end of every 4th (6th) row until increased to 64 (67) sts. When sleeve seam measures 10½″ (14″), K2 tog. each end of every 2nd row until decreased to 50 (51) sts. then every row until decreased to 12 (13) sts. Cast off.

NECKBAND: Join shoulder seams. With right side of work towards you, using No. 12 needles, pick up and K about 82 (86) sts. around neck. Work in rib of K1, P1, for ¾″. Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew sleeves around armholes. Sew up seams. Sew buttons on left front and a press stud at neck edge.

-DESIGN No. 478-

MITTENS
in "Twinprufe" 4-Ply Wool

MATERIALS REQUIRED: 1 ball F. W. Hughes' "Twinprufe" 4 ply Fingering Wool, shade No. 2090 (Sky); 1 pair No. 10 needles.

TENSION: 7 sts. 1″. 9 rows 1″.

Using No. 10 needles cast on 40 sts. Work as follows:—

1st Row: * K1, P1, repeat from * to end.

2nd Row: Repeat 1st row.

3rd Row: * P1, K1, repeat from * to end.

4th Row: Repeat 1st row.

Continue in pattern for 1¾″, then work in rib of K1, P1, for ¾″. Work 8 rows st.st.

1st Row: K18, K twice into next st., K2, K twice into next st., K18.

2nd and Alternate Rows: P.

3rd. Row: K18, K twice into next st., K4, K twice into next st., K18.

Continue in this way increasing 2 sts. every 2nd row until increased to 48 sts.

P 1 row.

Next Row: K18, sl. the next 12 sts. on to a spare needle and leave for thumb, K18.

Work 7 rows st.st.

Next Row: * K7, K2 tog., repeat from * to end.

Next and Alternate Rows: P.

Next Row: * K6, K2 tog., repeat from * to end.

Next Row: * K5, K2 tog., repeat from * to end.

Next Row: * K4, K2 tog., repeat from * to end.

Break off wool, draw through all sts. and fasten off. Work 6 rows st.st. on the 12 sts. for thumb, then draw wool through all sts. and fasten off. Work another mitten in same way.

TO MAKE UP: Press lightly with a warm iron and damp cloth. Sew up seam. Reinforce ribbing at wrist with lastex thread.

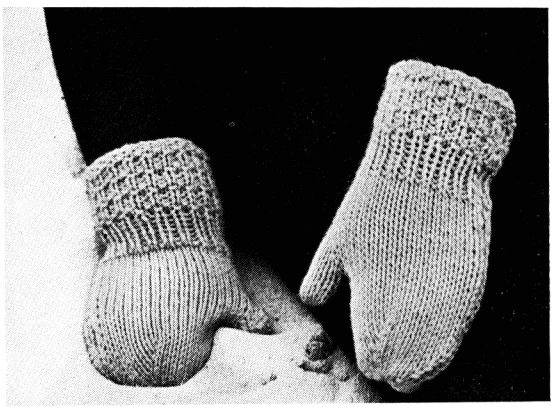

-DESIGN No. 450-

"GRENADIER" PULLOVER in "Twinprufe" Crochet Wool

MATERIALS REQUIRED: 4 (5-6) balls F. W. Hughes' "Twinprufe" Crochet Wool shade No. 567 (Grey), 1 ball each of shade Nos. 2138 (Red), 1075 (White), and 1016 (Black), 2 pairs needles Nos. 10 and 12, 3 small Buttons, a small quantity of red, blue, black and brown stranded cotton for embroidery.

MEASUREMENTS: Length from top of shoulder 13″ (14½″-16″). Chest 24″ (26″-28″). Length of sleeve seam 10″ (12½″-15″).

TENSION: 7 sts. 1″. 9 rows 1″.

BACK: Using No. 12 needles and G. wool, cast on 84 (92-100) sts. Work in rib of K1, P1, for 2½″ (3″-3″). Change to No. 10 needles, K 1 row and P 1 row. Work in following pattern:—

1st Row: K10 (14-18)G, (8B, 20G) twice, 8B, 10 (14-18)G.

2nd Row: P10 (14-18)G, (8B, 20G) twice, 8B, 10 (14-18)G.

3rd Row: K11 (15-19)G, (6B, 22G) twice, 6B, 11 (15-19)G.

4th Row: P11 (15-19)G, (6B, 22G) twice, 6B, 11 (15-19)G.

Repeat 3rd and 4th rows, 5 times.

15th Row: K11 (15-19)G, (6R, 22G) twice, 6R, 11 (15-19)G.

16th Row: P9 (13-17)G, (1R, 1G, 6R, 1G, 1R, 18G) twice, 1R, 1G, 6R, 1G, 1R, 9 (13-17)G.

17th Row: K9 (13-17)G, (1R, 1G, 6R, 1G, 1R, 18G) twice, 1R, 1G, 6R, 1G, 1R, 9 (13-17)G.

Repeat 16th row.

19th Row: K9 (13-17)G, (10R-18G) twice,

10R, 9 (13-17)G.
20th Row: P9 (13-17) G, (10R, 18G) twice, 10R, 9 (13-17)G.
Repeat 19th and 20th rows.
23rd Row: K12 (16-20)G, (4R, 24G) twice, 4R, 12 (16-20)G.
24th Row: P11 (15-19)G, (6W, 22G) twice, 6W, 11 (15-19)G.
25th Row: K11 (15-19)G, (6W, 22G) twice, 6W, 11 (15-19)G.
Repeat 24th row.
Repeat 25th and 24th rows.
29th Row: K11 (15-19)G, (6B, 22G) twice, 6B, 11 (15-19)G.
30th Row: P11 (15-19)G, (6B, 22G) twice, 6B, 11 (15-19)G.
Repeat 29th and 30th rows twice.
Repeat 29th row.
Continue across all sts. in G. wool and work in st.st. until work measures 8½″ (9½″-10½″). Shape armholes by casting off 4 (4-5) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 3 rows, then every 2nd row 3 times. When armholes measures 4½″ (5″-5½″) shape shoulders by casting off 6 (7-8) sts. at the beginning of the next 6 rows. Cast off.

FRONT: Work the same as for back until armholes measure 2″ (2½″-3″).
Next Row: K26 (29-32), leave on a spare needle, cast off 12 (14-14) sts., K26 (29-32). Continue on last 26 (29-32) sts. and K2 tog. at neck edge of the next 4 rows then every 2nd row until decreased to 18 (21-24) sts. When armhole measures 4½″ (5″-5½″), shape shoulder by casting off 6 (7-8) sts. at armhole edge every 2nd row 3 times. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 12 needles cast on 44 (46-48) sts. Work in rib of K1, P1, for 2″ (2½″-2½″). Change to No. 10 needles and work in st.st., increasing 1 st. each end of every 6th row until increased to 60 (66-72) sts. When sleeve seam measures 10″ (12½″-15″) or required length, K2 tog. each end of every 2nd row until decreased to 46 sts., then every row until decreased to 20 sts. Cast off.

NECKBAND: Join right shoulder seam. With right side of work towards you, using No. 12 needles, pick up and K about 88 (92-96) sts. around neck. Work in rib of K1, P1, for ¾″. Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Join up left shoulder seam for ½″. Sew in sleeves, placing seam to seam. Sew up seams. Work 2 rows of DC. along back and 1 row of DC. along front of shoulder opening, working 3 loops on front to form buttonholes. Sew on buttons. Using black stranded cotton, work straps around face and work nose and eyebrows. Using brown cotton, work guns and using white wool, work a belt. Make eyes and mouth with blue and red cottons.

How to wash woollies the safe way



1. **First** trace the outline of the garment on plain paper before washing.



2. **Next** Squeeze the garment gently through rich, lukewarm Lux suds. Rinse 3 times at the same temperature



3. **Then** roll the woolly flat in a towel to absorb moisture —but do not wring. Unroll immediately.



4. **Finally** ease back to original shape over pencilled outline and dry flat, away from heat.

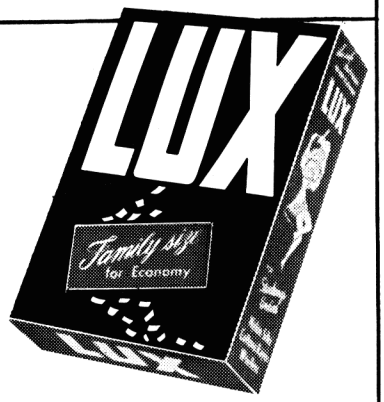

So safe . . . you'll want to use it always

U.423.TKR

-DESIGN No. 474-

BOY'S "TWINPRUFE" CROCHET WOOL PULLOVER

Illustrated on Back Cover

MATERIALS REQUIRED: 4 (5) balls F. W. Hughes' "Twinprufe" Crochet Wool shade No. 2163 (Blue), 1 ball shade No. 1075 (White), 2 pairs needles Nos. 12 and 10, 3 small buttons.

MEASUREMENTS: Length from top of shoulder 11½″ (12″). Chest 22″ (24″). Length of sleeve seam 9½″ (11″).

TENSION: 7 sts. 1″. 9 rows 1″.

BACK: Using No. 12 needles and BL. wool, cast on 80 (86) sts. Work in rib of K1, P1 for 1½″ (2″). Change to No. 10 needles and work as follows:—

Work 2 rows st.st.

1st Row: K1 (4) BL., * 1BL., 20W., 5BL., repeat from * to last 1 (4) sts. K1 (4) BL.

2nd Row: Using BL. wool, P.

3rd Row: K1 (4) BL., * 1BL., 20W., 5BL., repeat from * to last 1 (4) sts., K1 (4) BL.

4th Row: P1 (4) BL., * 8BL., 13W., 5BL., repeat from * to last 1 (4) sts., P1 (4) BL.

5th Row: K1 (4) BL., * 3BL., 16W., 7BL., repeat from * to last 1 (4) sts., K1 (4) BL.

6th Row: P1 (4) BL., * 6BL., 18W., 2BL., repeat from * to last 1 (4) sts., P1 (4) BL.

7th Row: K1 (4) BL., * 1BL., 5W., 3BL., 1W., 1BL., 3W., 2BL., 4W., 6BL., repeat from * to last 1 (4) sts., K1 (4) BL.

8th Row: P1 (4) BL., * 6BL., 4W., 1BL., 3W., (2BL., 2W.) twice, 1BL., 2W., 1BL. repeat from * to last 1 (4) sts., P1 (4) BL.

9th Row: K1 (4) BL., * 4BL., 4W., 2BL., 1W., 1BL., 2W., 2BL., 4W., 6BL., repeat from * to last 1 (4) sts., K1 (4) BL.

10th Row: P1 (4) BL, * 7BL., 3W., 3BL., 3W., 6BL., 1W., 3BL., repeat from * to last 1 (4) sts., P1 (4) BL.

11th Row: K1 (4) BL., * 2BL., 3W., 2BL., 3W., 5BL., 3W., 8BL., repeat from * to last 1 (4) sts., K1 (4) BL.

12th Row: P1 (4) BL., * 9BL., 3W., 6BL., 8W., repeat from * to last 1 (4) sts., P1 (4) BL.

13th Row: K1 (4) BL., * 13BL., 3W., 10BL., repeat from * to last 1 (4) sts., K1 (4) BL.

14th Row: P1 (4) BL., * 11BL., 2W., 13BL., repeat from * to last 1 (4) sts., P1 (4) BL.

15th Row: K1 (4) BL., * 13BL, 2W., 4BL., 2W., 5BL., repeat from * to last 1 (4) sts. K1 (4) BL.

16th Row: P1 (4) BL., * 6BL., 3W., 2BL., 2W., 13BL., repeat from * to last 1 (4) sts., P1 (4) BL.

17th Row: K1 (4) BL., * 13BL., 5W., 1BL., 1W., 6BL., repeat from * to last 1 (4) sts., K1 (4) BL.

18th Row, P1 (4) BL., * 7BL., 5W., 14BL., repeat from * to last 1 (4) sts., P1 (4) BL.

19th Row: K1 (4) BL, * 15BL., 2W., 9BL., repeat from * to last 1 (4) sts., K1 (4) BL.

20th Row: Using BL. wool, P.

Continue in st.st. with BL. wool and when work measures 7″ (7½″), shape armholes by casting off 2 (3) sts. at the beginning of the next 2 rows. K2 tog., each end of the next 3 (3) rows, then every 2nd row 3 (3) times. When armhole measures 4″ (4½″), shape shoulders by casting off 6 (6) sts. at the beginning of the next 6 rows. Cast off.

FRONT: Work the same as for back until armholes measure 2½″ (2¾″).

Next Row: Work 28 (29) sts. (leave on a spare needle), cast off 8 (10) sts., work 28 (29) sts. Continue on last 28 (29) sts. and K2 tog. at neck edge of the next 8 rows, then every 2nd

row until decreased to 18 sts. When armhole measures 4″ (4½″), shape shoulder by casting off 6 sts. at armhole edge every 2nd row 3 times. Join wool at neck edge and work other side to correspond.

SLEEVES: Using No. 12 needles and BL wool, cast on 44 (46) sts. Work in rib of K1, P1, for 2″. Change to No. 10 needles and work in st.st., increasing 1 st. each end of every 6th row until increased to 58 (62) sts.

When sleeve seam measures 9½″ (11″), or required length, K2 tog. each end of every 2nd row until decreased to 48 sts., then every row until decreased to 18 sts. Cast off.

NECKBAND: Join shoulder seams, leaving an opening on right shoulder. With right side of work towards you, using No. 12 needles, pick up and K about 90 (92) sts. around neck. Work in rib of K1, P1 for ¾″ (¾″). Cast off in ribbing.

TO MAKE UP: Press with a warm iron and damp cloth. Sew sleeves around armholes. Sew up seams. Work 2 rows of D.C. along back of shoulder opening and 1 row along front, then crochet three loops of chain to form buttonholes. Sew on buttons.

DESIGN No. 469 **Continued from Page 5**

2nd Finger: Take 6 sts. from each needle, pick up 2 sts., at base of 1st finger, cast on 1 st. at the beginning of first 2 rows (16 sts.). Work in st.st. for 2″. Shape the top the same as for thumb.

3rd Finger: Take 6 sts. from each needle, pick up 2 sts. at base of 2nd finger. Work on these 14 sts. in st.st. for 1¾″.

Next Row: K2, * K2 tog., K2, repeat from * to end.

Next Row: * P1, P2 tog., repeat from * to last 2 sts., P2.

Next Row: (K2 tog.) 4 times.

Finish as before.

4th Finger: Take remaining 10 sts. and pick up 2 sts. at base of 3rd finger.

Work on these 12 sts. in st.st. for 1½″.

Next Row: * K2 tog., K2, repeat from * to end.

Next Row: * P1, P2 tog., repeat from * to end.

Next Row: (K2 tog.) 3 times.

Finish off as before. Work right glove to correspond.

Precious hand knitteds deserve the best in buttons

Every glamorous Beauclaire button is guaranteed to wash and dry clean perfectly. Beauclaire buttons have been plant-tested and approved by the Federal Council of Dry Cleaners of Australia

Ask for Beauclaire buttons at all good button counters, and look for the pretty budget collection on the Beauclaire Self Server

Beauclaire

THE BUDGET BUTTON

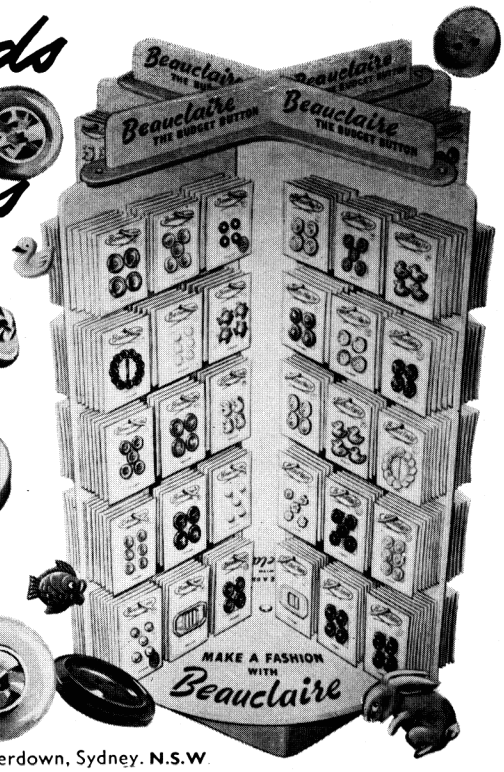

a product of General Plastics Limited, 16 Larkin Street, Camperdown, Sydney. N.S.W.

-DESIGN No. 461-

GIRL'S "TWINPRUFE" 4-PLY CARDIGAN

Illustrated at Right

MATERIALS REQUIRED: 5 (6-7) balls F. W. Hughes' "Twinprufe" 4 ply Fingering Wool shade No. 2435 (Carnation), 2 prs. needles Nos. 10 and 12, 5 buttons.

MEASUREMENTS: Length from top of shoulder 11″ (12″-15″). Chest 22″ (24″-26″). Length of sleeve seam 9″ (10″-14″).

TENSION: 7 sts. 1″. 9 rows 1″.

BACK: Using No. 12 needles cast on 76 (82-88) sts. Work in rib of K1, P1, for 1″. Change to No. 10 needles and work as follows:—

1st Row: P.

2nd Row: P.

3rd Row: K.

4th Row: P.

5th Row: P4 * (with right hand needle, pick up the st. on the edge of ridge below (1st row of pattern) directly under the next st. on left hand needle, sl. this st. on to left hand needle and P it tog. with next st. on needle) twice, P4, repeat from * to end.

6th Row: K.

7th Row: P.

8th Row: P.

9th Row: K.

10th Row: P.

11th Row: P1 * (pick up the st. from 7th row and P it tog. with next st., on left hand needle) twice, P4, repeat from * ending with P1 instead of P4.

12th Row: K.

FREE! *Booklet of latest Twinprufe styles — fill in this coupon and post to:*

Advertising Dept.,
F. W. Hughes,
30 Grosvenor Street,
Sydney, N.S.W.

Please send me a free Booklet of your latest Twinprufe styles, B194.

Name .....

Address .....

..... *State*.....

Repeat these 12 rows and when work measures 7½″ (8″-9½″), shape armholes by casting off 3 (3-6) sts. at the beginning of the next 2 rows. K2 tog. each end of the next 3 (3-3) rows. When armhole measures 3½″ (4″-4½″) shape shoulder by casting off 6 (5-5) sts. at the beginning of the next 6 (8-8) rows. Cast off.

LEFT FRONT: Using No. 12 needles cast on 46 (48-52) sts. Work in rib of K1, P1, for 1″. Change to No. 10 needles.

1st Row: P to last 6 (8-6) sts., sl. 6 (8-6) for border on to a spare needle.

2nd Row: P.

Continue in pattern and when work measures 7½″ (8″-9½″), cast off 3 (3-6) sts. at armhole edge, work to last 2 sts., P2 tog.

Continue to decrease one st. at centre front every 2nd row and at the same time K2 tog. at armhole edge every row 3 (3-3) times.

Continue to decrease at centre front every 2nd row until decreased to 18 (20-20) sts. When armhole measures 3½″ (4″-4½″) shape shoulder by casting off 6 (5-5) sts. at armhole edge every 2nd row 3 (4-4) times.

Using No. 12 needles, work 6 (8-6) sts. of border in rib for 11¼″ (12¼″-14¼″). Cast off.

RIGHT FRONT: Work to correspond with left front working shapings at opposite ends and making buttonholes in border as follows:— 1st one being ½″ from lower edge and 4 more evenly spaced about 1½″ apart.

BUTTONHOLES

1st Row: Rib 3, cast off 2 sts., work to end of row.

2nd Row: Work to last 3 sts., cast on 2 sts., rib 3.

SLEEVES: Using No. 12 needles cast on 40 (40-46) sts. Work in rib of K1, P1, for 1″ (1½″-1¾″). Change to No. 10 needles and work in pattern, increasing 1 st. each end of every 6th row until increased to 62 (64-70) sts. When sleeve seam measures 9″ (10″-14″), or required length, K2 tog. each end of every 2nd row until decreased to 50 sts., then every row until decreased to 20 sts. Cast off.

TO MAKE UP: Press all parts except ribbing with a warm iron and damp cloth. Sew up shoulder seams. Stitch sleeves around armholes. Sew up side and sleeve seams. Join borders to fronts and stitch at back of neck. Sew buttons on left front.

Published with all rights reserved by F. W. Hughes Pty. Ltd., 30 Grosvenor Street, Sydney, wholly set up and printed by Waite & Bull Pty. Ltd., 486 Elizabeth Street, Sydney.

Twinprufe

FWH SYDNEY

CHILDREN'S DESIGNS

THREE—SIX YEARS

BOOK No. 194

1/6

F. W. HUGHES PTY. LTD., 30 GROSVENOR ST., SYDNEY, N.S.W.